

MaxAtec 100 : S01/B01 - S02/B02

MaxAtec 100 : S01/B01

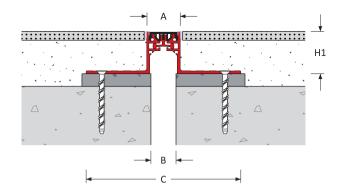

## MaxAtec 100 : S02/B02

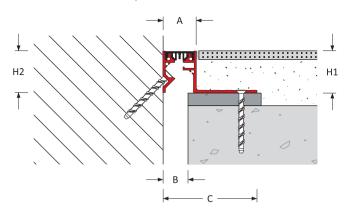

## **Expansion Joint Selection Criteria** Load Rating

#### **Product Details**

Joint	Gap	Movemen	t		Eurocod	e Rating		Product Di	mensions			Product
Location	Width	Capacity (ı	mm)		П.			Hei	ght	Sightline	Blockout	Number
	B(mm)	±	[Total]				00 0	H1 (mm)	H2 (mm)	A (mm)	C (mm)	
	30	± 5	[10]	5 kN	46 kN				41	185	100-S/B01-030-(H1)	
Floor - Floor	50	± 10	[20]	2 kN	31 kN	-	-	26: 36: 51: 71	-	72	216	100-S/B01-050-(H1)
	75	± 15	[30]	Z KIN	STKN					94	238	100-S/B01-075-(H1)
Floor - Wall	30	± 5	[10]	5 kN	46 kN	-	-	26: 36: 51: 71	51	41	113	100-S/B02-030-(H1)
	50	± 10	[20]	2 kN	31 kN				76	72	144	100-S/B02-050-(H1)
	75	± 15	[30]							94	166	100-S/B02-075-(H1)

When specifying or ordering please add the height (H1) required to the Product Reference. For example MaxAtec 100: S01-030-051 denotes a joint 51mm high.

Joints 100-S01 and S02 have stainless steel cappings. Joints 100-B01 and B02 have brass cappings.

#### **Complementary Systems**

Internal Wall - 100 : A07-A09 - Pg 68 - 69





Floor to Floor | Floor to Wall 30 - 75 mm (1 1/4 - 3") Expansion Gaps



**Features** 

**Surface** 

Smooth surface

Centre supported and Americans with Disabilities Act (ADA) compliant across the entire movement cycle

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## **Traffic Frequency per day**

Ż					
≤ 25,000	≤ 10	≤ 10	-	-	

# **System Options**

Gap width(s)	30, 50, 75 mm
Height(s)	26, 36, 51, 71 mm
Metal type(s)	Aluminium
	Stainless Steel cappings
	Brass cappings
Seal colour(s)	Black, Grey, Stone
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

