


SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall


25 - 50 mm (1 - 2") Expansion Gaps

MaxAtec 130 : A07-A09

MaxAtec 130 : A07

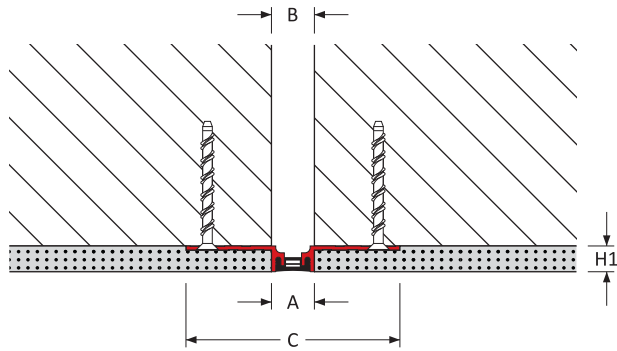

MaxAtec 130 : A09

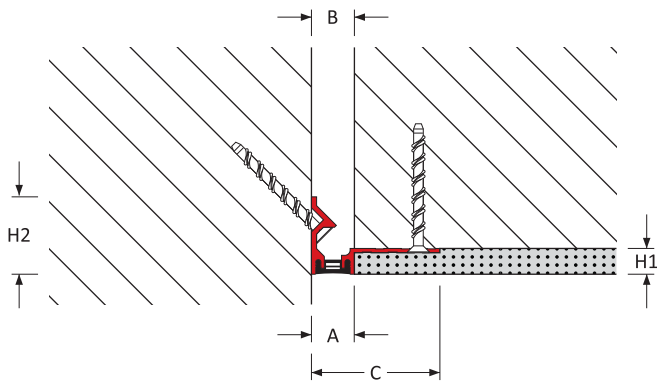

Expansion Joint Selection Criteria

Load Rating

Product Details

| Joint Location | Gap Width B(mm) | Movement Capacity (mm) | | Eurocode Rating | | | | Product Dimensions | | | | Product Number |
|----------------|--------------------|------------------------|---------|-----------------|---|---|---|--------------------|---------|-----------|----------|----------------|
| | | ± | [Total] | | | | | Height | | Sightline | Blockout | |
| | | | | | | | | H1 (mm) | H2 (mm) | A (mm) | C (mm) | |
| Wall - Wall | 25 | ± 5 | [10] | - | - | - | - | 10:15 | - | 25 | 125 | 130-A07-025 |
| | 50 | ± 10 | [20] | - | - | - | - | | | 47 | 147 | 130-A07-050 |
| Corner Wall | 25 | ± 5 | [10] | - | - | - | - | 10:15 | 45 | 25 | 75 | 130-A09-025 |
| | 50 | ± 10 | [20] | - | - | - | - | | | 47 | 97 | 130-A09-050 |

Features

Surface

Smooth surface

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Traffic Frequency per day



- - - - -

System Options

| | |
|-------------------------|--------------------|
| Gap width(s) | 25, 50 mm |
| Height(s) | 10, 15 mm |
| Metal type(s) | Aluminium |
| Seal colour(s) | Black, Grey, Stone |
| Fire barrier | 120-240 minutes |
| Waterproofing | Moisture barrier |
| Pre-assembly in factory | Contact Vexcolt |

MaxAtec 130 : A07-A09



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
 Department Stores | Distribution & Retail Warehouses
 Factories | Hospitals | Museums | Offices & Hotels
 Parking | Places of Worship | Residential Buildings
 Rail, Metros & Elevated Rail Stations | Roads & Bridges
 Shopping Centres | Sports Stadiums | Supermarkets