


SINGLE-SEAL EXPANSION JOINT

Wall to Wall

100 - 150 mm (4 - 6") Expansion Gaps

MaxAtec 160 : A07

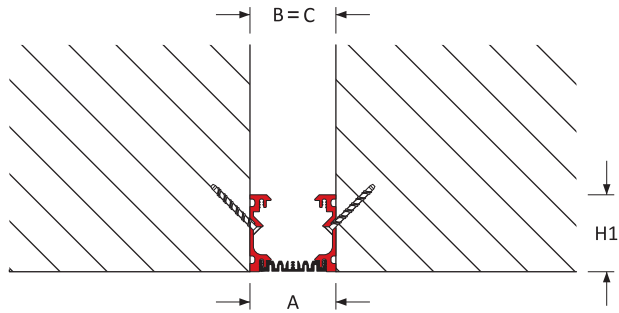

Expansion Joint Selection Criteria				Load Rating				Product Details				
Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions Height		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall - Wall	100	± 50	[100]	-	-	-	-	90	-	100	100	160-A07-100
	125	± 60	[120]	-	-	-	-			125	125	160-A07-125
	150	± 75	[150]	-	-	-	-			150	150	160-A07-150

Features

Surface

Ribbed surface for greater movement

Movement

High movement capacity

Seismic movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Class III: Seismic

Traffic Frequency per day



- - - - -

System Options

Gap width(s) 100, 125, 150 mm

Height(s) 90 mm

Metal type(s) Aluminium

Seal colour(s) Black, Grey, Stone

Fire barrier 120-240 minutes

Waterproofing Moisture barrier

Pre-assembly in factory Contact Vexcolt



MaxAtec 160 : A07

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets