


MULTI-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall


100 - 150 mm (4 - 6") Expansion Gaps

MaxAtec 220 : A01-A02

MaxAtec 220 : A01

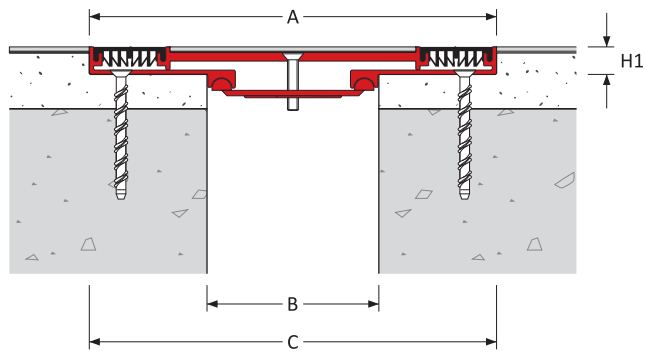

MaxAtec 220 : A02

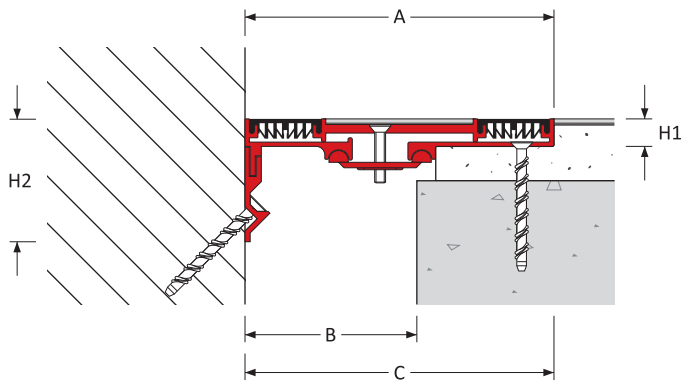

Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Floor - Floor	100	± 25	[50]	-	-	-	-	16	-	237	237	220-A01-100
	150									289	289	220-A01-150
Floor - Wall	100	± 25	[50]	-	-	-	-	16	70	180	180	220-A02-100
	150									220	220	220-A02-150

Features

Surface

Smooth surface

Americans with Disabilities Act (ADA) compliant across the entire movement cycle

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Traffic Frequency per day

				
≤ 5,000	-	-	-	-

System Options

Gap width(s)	100, 150 mm
Height(s)	16 mm
Metal type(s)	Aluminium
Seal colour(s)	Black, Grey, Stone
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



MaxAtec 220 : A01-A02



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets