


CONTROL JOINT

Floor to Floor

10 - 20 mm (13/32 - 25/32") Joint Width

Micratec : TA

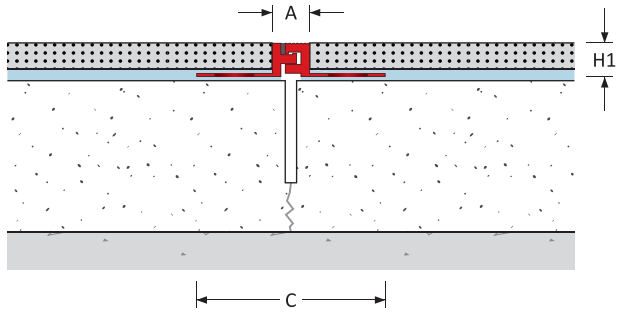

Control Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline A (mm)	Blockout C (mm)	
								H1 (mm)	H2 (mm)			
Floor - Floor	-	± 1.0	[2.0]	2 kN	31 kN	30 kN	120 kN	8: 10: 12	-	10	50	TA-010-(H1)
		± 1.5	[3.0]							15	55	TA-015-(H1)
		± 2.5	[5.0]							20	60	TA-020-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.

For example Micratec : TA-015-010 denotes a control joint suitable for paving <10mm deep laid onto an adhesive bed.

Micratec : TA

Features

Surface

Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle

10mm minimum visible line width between finishes

Movement

Excellent movement capacity for profile width

Traffic Frequency per day

				
> 25,000	≤ 100	≤ 100	≤ 100	≤ 10

System Options

Sightline width(s)	10, 15, 20 mm
Height(s)	8, 10, 12 mm
Metal type(s)	Aluminium
Seal colour(s)	No seal used
Pre-assembly in factory	Not applicable



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
 Department Stores | Distribution & Retail Warehouses
 Factories | Hospitals | Museums | Offices & Hotels
 Parking | Places of Worship | Residential Buildings
 Rail, Metros & Elevated Rail Stations | Roads & Bridges
 Shopping Centres | Sports Stadiums | Supermarkets