


## CONTROL JOINT

Floor to Floor

10 - 20 mm ( 13/32 - 25/32" ) Joint Width

# Micratec : TB

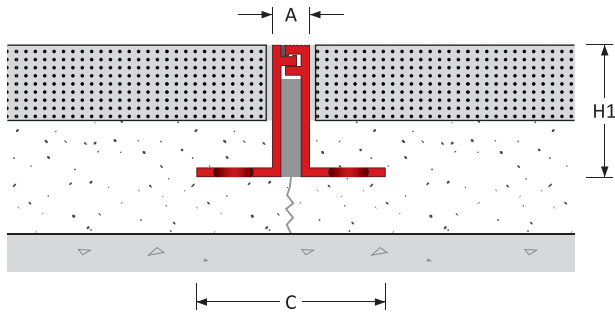

### Control Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline A (mm)	Blockout C (mm)	
Floor - Floor	-	± 1.0	[2.0]	10 kN	46 kN	30 kN	120 kN	25: 35: 50: 75	-	10	50	TB-010-(H1)
		± 1.5	[3.0]							15	55	TB-015-(H1)
		± 2.5	[5.0]	5 kN	31 kN	-	20			60	TB-020-(H1)	

When specifying or ordering please add the **height (H1)** required to the Product Reference.  
For example Micratec : TB-015-050 denotes a control joint 50mm deep.

**Micratec : TB**

**Features**

**Surface**

Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle  
10mm minimum visible line width between finishes

**Movement**

Excellent movement capacity for profile width

**Traffic Frequency per day**

				
> 25,000	≤ 100	≤ 100	≤ 100	≤ 10

**System Options**

Sightline width(s)	10, 15, 20 mm
Height(s)	25, 35, 50, 75 mm
Metal type(s)	Aluminium
Seal colour(s)	No seal used
Pre-assembly in factory	Not applicable



**APPLICATIONS**

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets