


SINGLE-SEAL EXPANSION JOINT

Wall to Wall
100 - 150 mm (4 - 6") Expansion Gaps



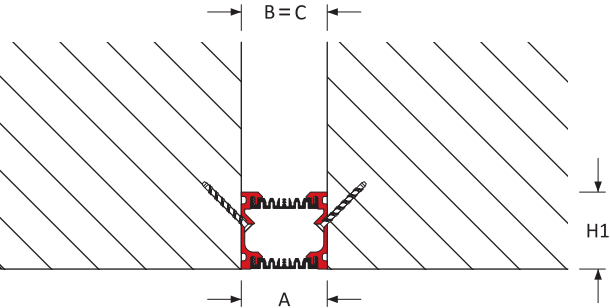

MaxAtec 161 : A07



Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					Height H1 (mm)	H2 (mm)			
Wall - Wall	100	± 50	[100]	-	-	-	-	90	-	100	100	161-A07-100
	125	± 60	[120]							125	125	161-A07-125
	150	± 75	[150]							150	150	161-A07-150

Features

Surface

Ribbed surface for greater movement

Movement

High movement capacity

Seismic movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Class III: Seismic

Traffic Frequency per day



-

-

-

-

-

System Options

Gap width(s) 100, 125, 150 mm

Height(s) 90 mm

Metal type(s) Aluminium

Seal colour(s) Black, Grey, Stone

Fire barrier 120-240 minutes

Waterproofing Moisture barrier

Pre-assembly in factory Contact Vexcolt

SINGLE-SEAL EXPANSION JOINT

Wall to Wall

100 - 150 mm (4 - 6") Expansion Gaps

MaxAtec 161 : A07



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
 Department Stores | Distribution & Retail Warehouses
 Factories | Hospitals | Museums | Offices & Hotels
 Parking | Places of Worship | Residential Buildings
 Rail, Metros & Elevated Rail Stations | Roads & Bridges
 Shopping Centres | Sports Stadiums | Supermarkets

www.vexcolt.com