


## SINGLE-SEAL EXPANSION JOINT

Suspended Ceiling


25 - 100 mm ( 1 - 4" ) Expansion Gaps

# MaxAtec 115 : A07-A09

### MaxAtec 115 : A07

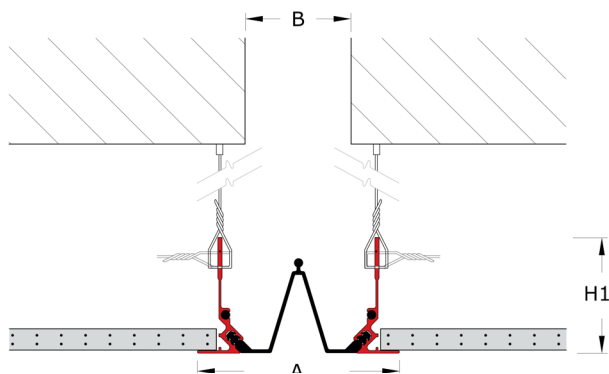

### MaxAtec 115 : A09

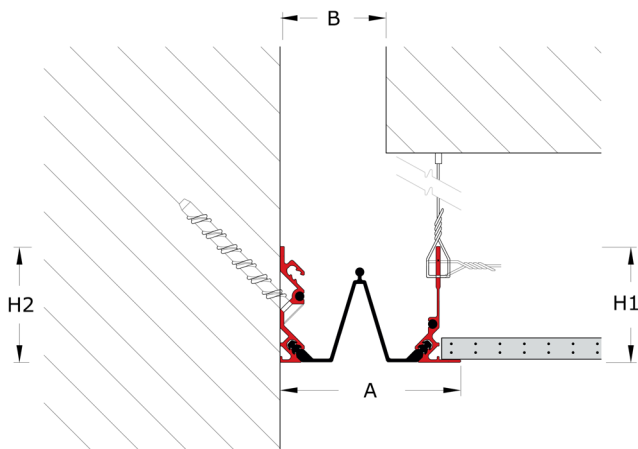

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions			Product Number	
		±	[Total]					Height H1 (mm)	H2 (mm)	Sightline A (mm)		Blockout C (mm)
Suspended Ceiling	25	± 12	[25]	-	-	-	-	55	-	70	-	115-A07-025
	50	± 25	[50]	-	-	-	-			95		115-A07-050
	75	± 37	[75]	-	-	-	-			120		115-A07-075
	100	± 50	[100]	-	-	-	-			145		115-A07-100
Suspended Ceiling - Wall	25	± 12	[25]	-	-	-	-	55	55	60	-	115-A09-025
	50	± 25	[50]	-	-	-	-			85		115-A09-050
	75	± 37	[75]	-	-	-	-			110		115-A09-075
	100	± 50	[100]	-	-	-	-			135		115-A09-100

## Features

### Surface

Ribbed surface for improved movement

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal  
Class II: Wind  
Class III: Seismic

## Traffic Frequency per day



- - - - -

## System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	55 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120 minutes
Waterproofing	Moisture barrier
Aluminium Finish	25 micron clear satin anodised
Pre-assembly in factory	Contact Vexcolt

# MaxAtec 115 : A07-A09



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets