


## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner to Wall


25 - 50 mm ( 1 - 2" ) Expansion Gaps

# MaxAtec 130 : B07-B09

## MaxAtec 130 : B07

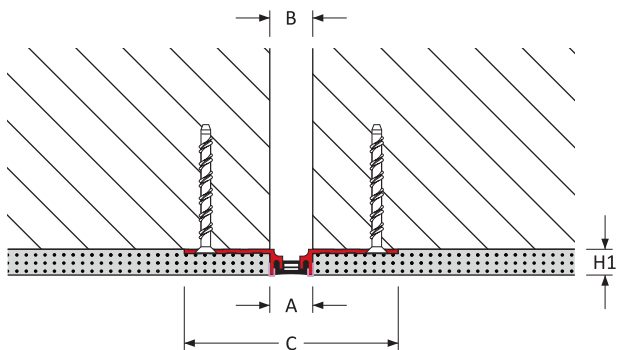

## MaxAtec 130 : B09

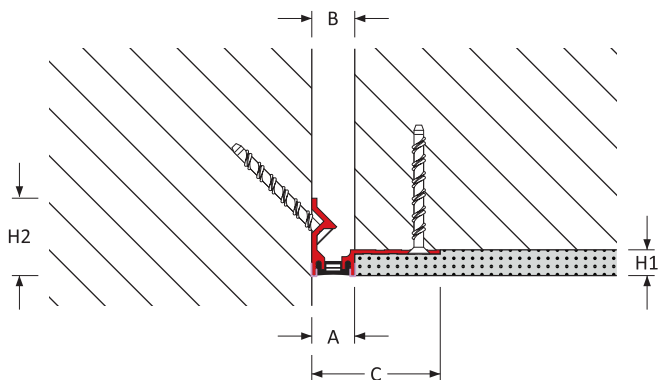

## Expansion Joint Selection Criteria

## Load Rating

## Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions Height		Sightline	Blockout	Product Number
		±	[Total]					H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Wall - Wall	25	± 5	[10]	-	-	-	-	11: 16	-	26	125	130-B07-025-(H1)
	50	± 10	[20]	-	-	-	-	11: 16	-	49	147	130-B07-050-(H1)
Corner - Wall	25	± 5	[10]	-	-	-	-	11: 16	45	26	75	130-B09-025-(H1)
	50	± 10	[20]	-	-	-	-	11: 16	45	49	97	130-B09-050-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.  
For example MaxAtec 130 : B07-025-011 denotes a joint 11 mm high.

## Features

### Surface

Smooth surface

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day

				
-	-	-	-	-

## System Options

Gap width(s)	25, 50 mm
Height(s)	11, 16 mm
Metal type(s)	6063 T5 & T6 Aluminium
	Brass cappings
Seal colour(s)	Black (RAL 7021)
	Grey (RAL 7038)
	Beige (RAL 1015)
Fire barrier	120 minutes
Waterproofing	Moisture barrier

SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner to Wall

25 - 50 mm ( 1 - 2" ) Expansion Gaps

## MaxAtec 130 : B07-B09



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
 Department Stores | Distribution & Retail Warehouses  
 Factories | Hospitals | Museums | Offices & Hotels  
 Parking | Places of Worship | Residential Buildings  
 Rail, Metros & Elevated Rail Stations | Roads & Bridges  
 Shopping Centres | Sports Stadiums | Supermarkets

[www.vexcolt.com](http://www.vexcolt.com)