


## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner to Wall


25 - 50 mm (1 - 2") Expansion Gaps

# MaxAtec 130 : S07-S09

### MaxAtec 130 : S07

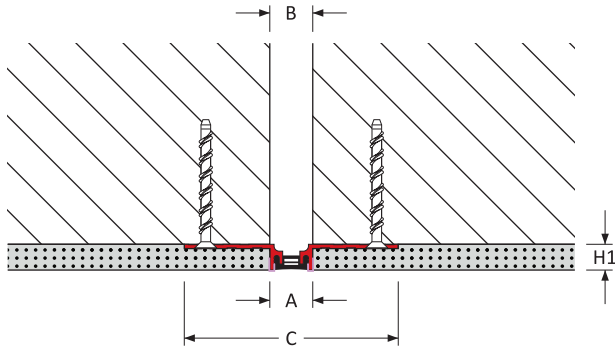

### MaxAtec 130 : S09

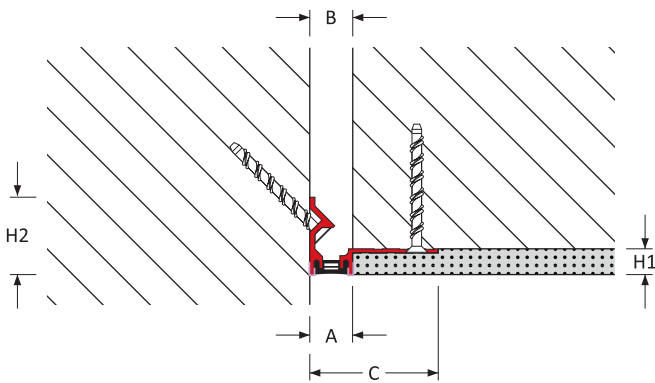

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Wall - Wall	25	± 5	[10]	-	-	-	-	11: 16	-	26	125	130-S07-025-(H1)
	50	± 10	[20]	-	-	-	-			49	147	130-S07-050-(H1)
Corner - Wall	25	± 5	[10]	-	-	-	-	11: 16	45	26	75	130-S09-025-(H1)
	50	± 10	[20]	-	-	-	-			49	97	130-S09-050-(H1)

When specifying or ordering please add the height (H1) required to the Product Reference.  
For example MaxAtec 130 : S07-025-011 denotes a joint 11 mm high.

## Features

### Surface

Smooth surface

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day



- - - - -

## System Options

Gap width(s)	25, 50 mm
Height(s)	11, 16 mm
Metal type(s)	6063 T5 & T6 Aluminium Stainless Steel cappings
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120 minutes
Waterproofing	Moisture barrier

# MaxAtec 130 : S07-S09



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
 Department Stores | Distribution & Retail Warehouses  
 Factories | Hospitals | Museums | Offices & Hotels  
 Parking | Places of Worship | Residential Buildings  
 Rail, Metros & Elevated Rail Stations | Roads & Bridges  
 Shopping Centres | Sports Stadiums | Supermarkets