


SINGLE-SEAL EXPANSION JOINT

Suspended Ceiling


25 - 50 mm (1 - 2") Expansion Gaps

MaxAtec 137 : A07-A09

MaxAtec 137 : A07

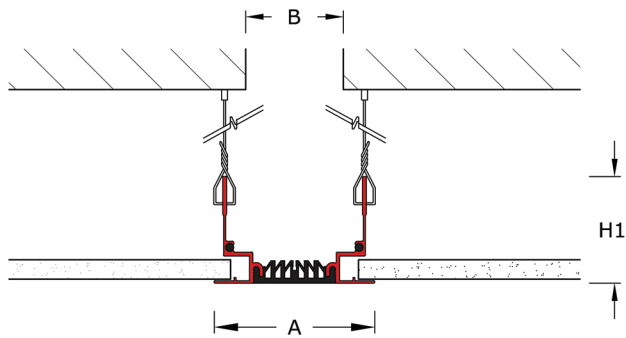

MaxAtec 137 : A09

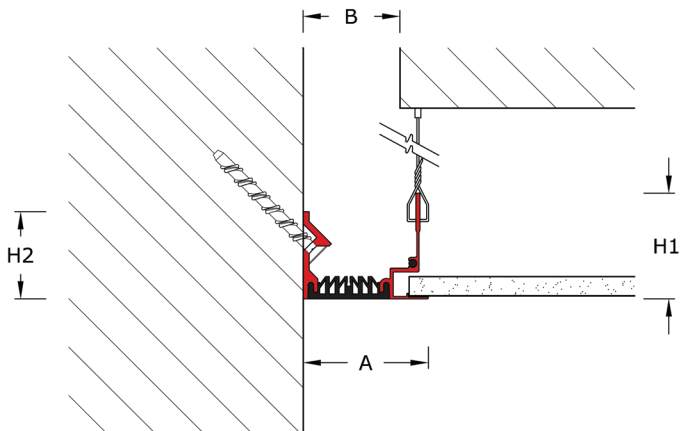

Expansion Joint Selection Criteria

Load Rating

Product Details

| Joint Location | Gap Width B (mm) | Movement Capacity (mm) | | Eurocode Rating | | | | Product Dimensions | | | | Product Number |
|--------------------------|------------------|------------------------|---------|-----------------|---|---|---|--------------------|---------|-----------|----------|----------------|
| | | ± | [Total] | | | | | Height | | Sightline | Blockout | |
| | | | | | | | | H1 (mm) | H2 (mm) | A (mm) | C (mm) | |
| Suspended Ceiling | 25 | ± 5 | [10] | - | - | - | - | 55 | - | 59 | - | 137-A07-025 |
| | 50 | ± 10 | [20] | - | - | - | - | | | 82 | | |
| Suspended Ceiling - Wall | 25 | ± 5 | [10] | - | - | - | - | 55 | 45 | 59 | - | 137-A09-025 |
| | 50 | ± 10 | [20] | - | - | - | - | | | 65 | | 137-A09-050 |

Features

Surface

Smooth surface

Movement

ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day




- - - - -

System Options

| | |
|-------------------------|---|
| Gap width(s) | 25, 50 mm |
| Height(s) | 55 mm |
| Metal type(s) | 6063 T5 & T6 Aluminium |
| Seal colour(s) | Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015) |
| Fire barrier | 120 minutes |
| Waterproofing | Moisture barrier |
| Aluminium Finish | 25 micron clear satin anodised |
| Pre-assembly in factory | Contact Vexcolt |

MaxAtec 137 : A07-A09

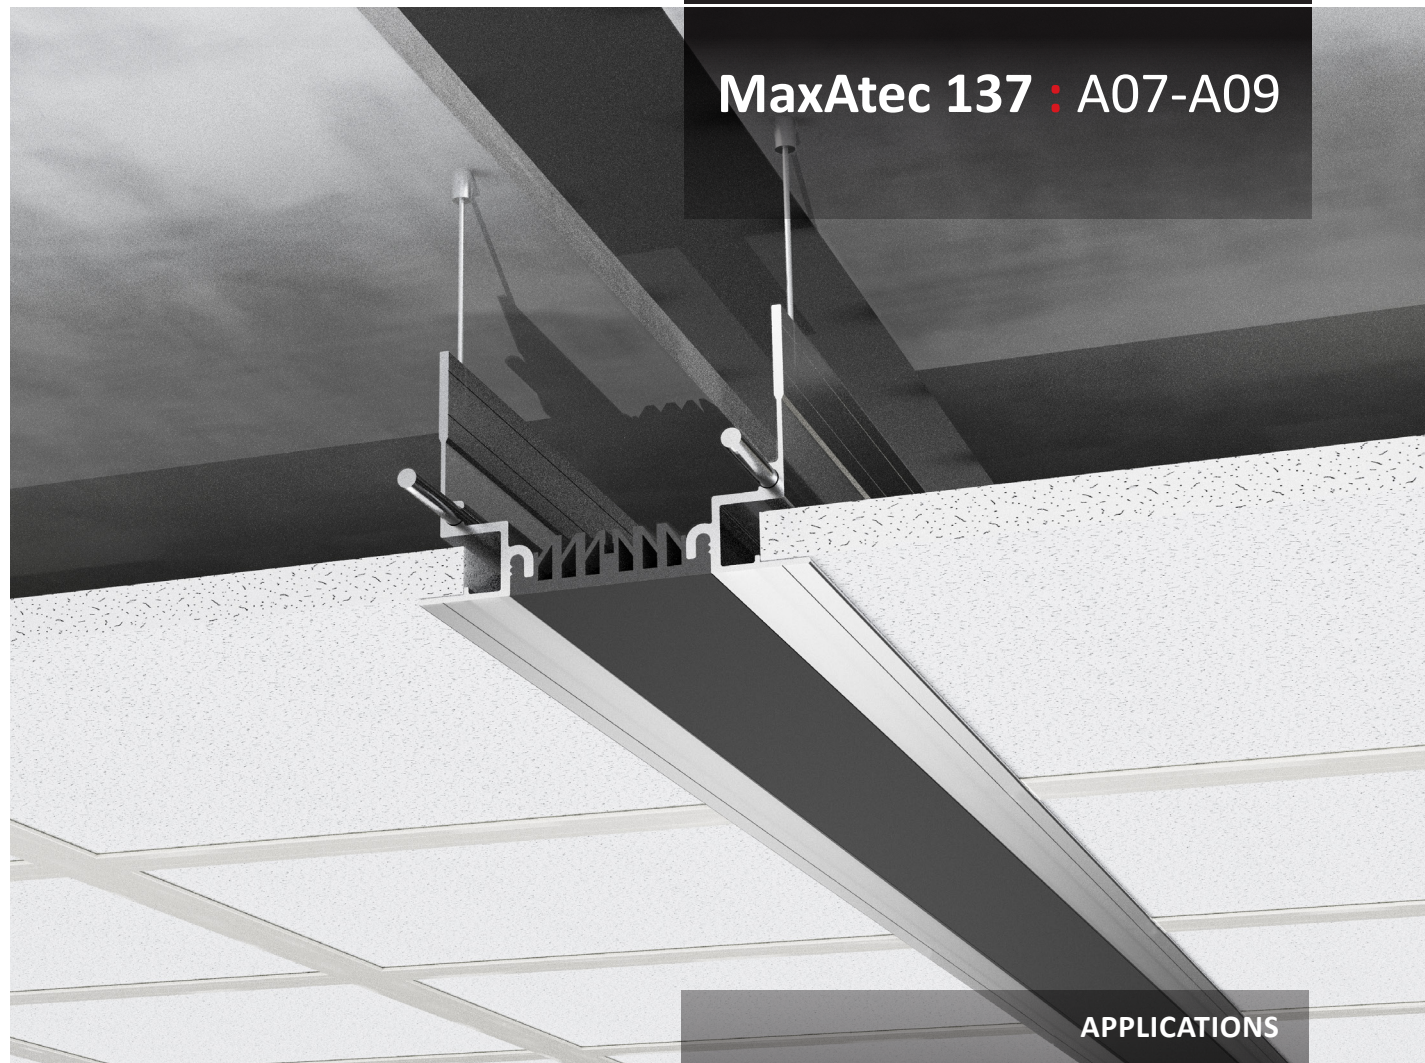

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
 Department Stores | Distribution & Retail Warehouses
 Factories | Hospitals | Museums | Offices & Hotels
 Parking | Places of Worship | Residential Buildings
 Rail, Metros & Elevated Rail Stations | Roads & Bridges
 Shopping Centres | Sports Stadiums | Supermarkets