


SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner to Wall


25 - 100 mm (1 - 4") Expansion Gaps

MaxAtec 150 : A07-A09

MaxAtec 150 : A07

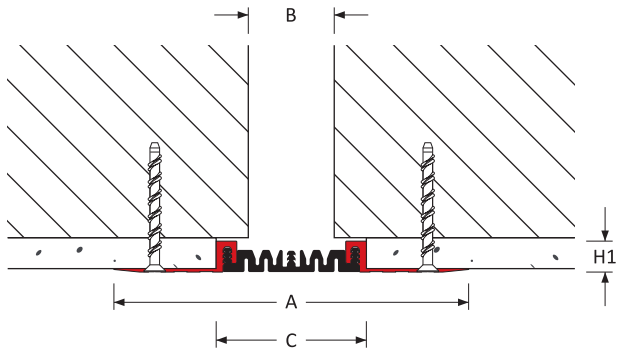

MaxAtec 150 : A09

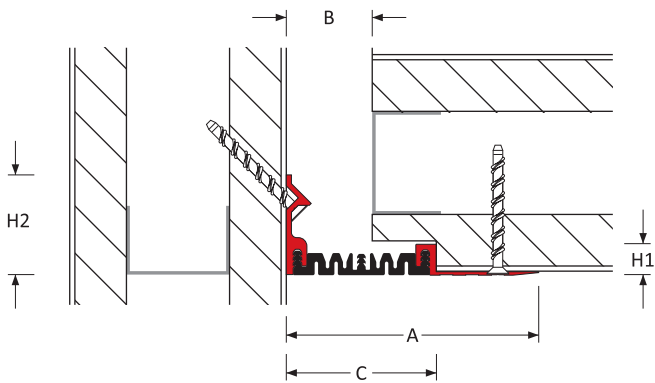

Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall - Wall	25	± 6	[12]	-	-	-	-	16	-	189	70	150-A07-025
	50	± 12	[25]							206	87	150-A07-050
	75	± 20	[40]							230	111	150-A07-075
	100	± 25	[50]							255	136	150-A07-100
Corner - Wall	25	± 6	[12]	-	-	-	-	16	58	129	70	150-A09-025
	50	± 12	[25]							147	87	150-A09-050
	75	± 20	[40]							170	111	150-A09-075
	100	± 25	[50]							196	136	150-A09-100

Features

Surface

Surface mounted
 Ribbed surface for greater movement

Movement


High movement capacity
 ASTM E-1399 Class I: Thermal
 Class II: Wind

Traffic Frequency per day

				
-	-	-	-	-

System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	16 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

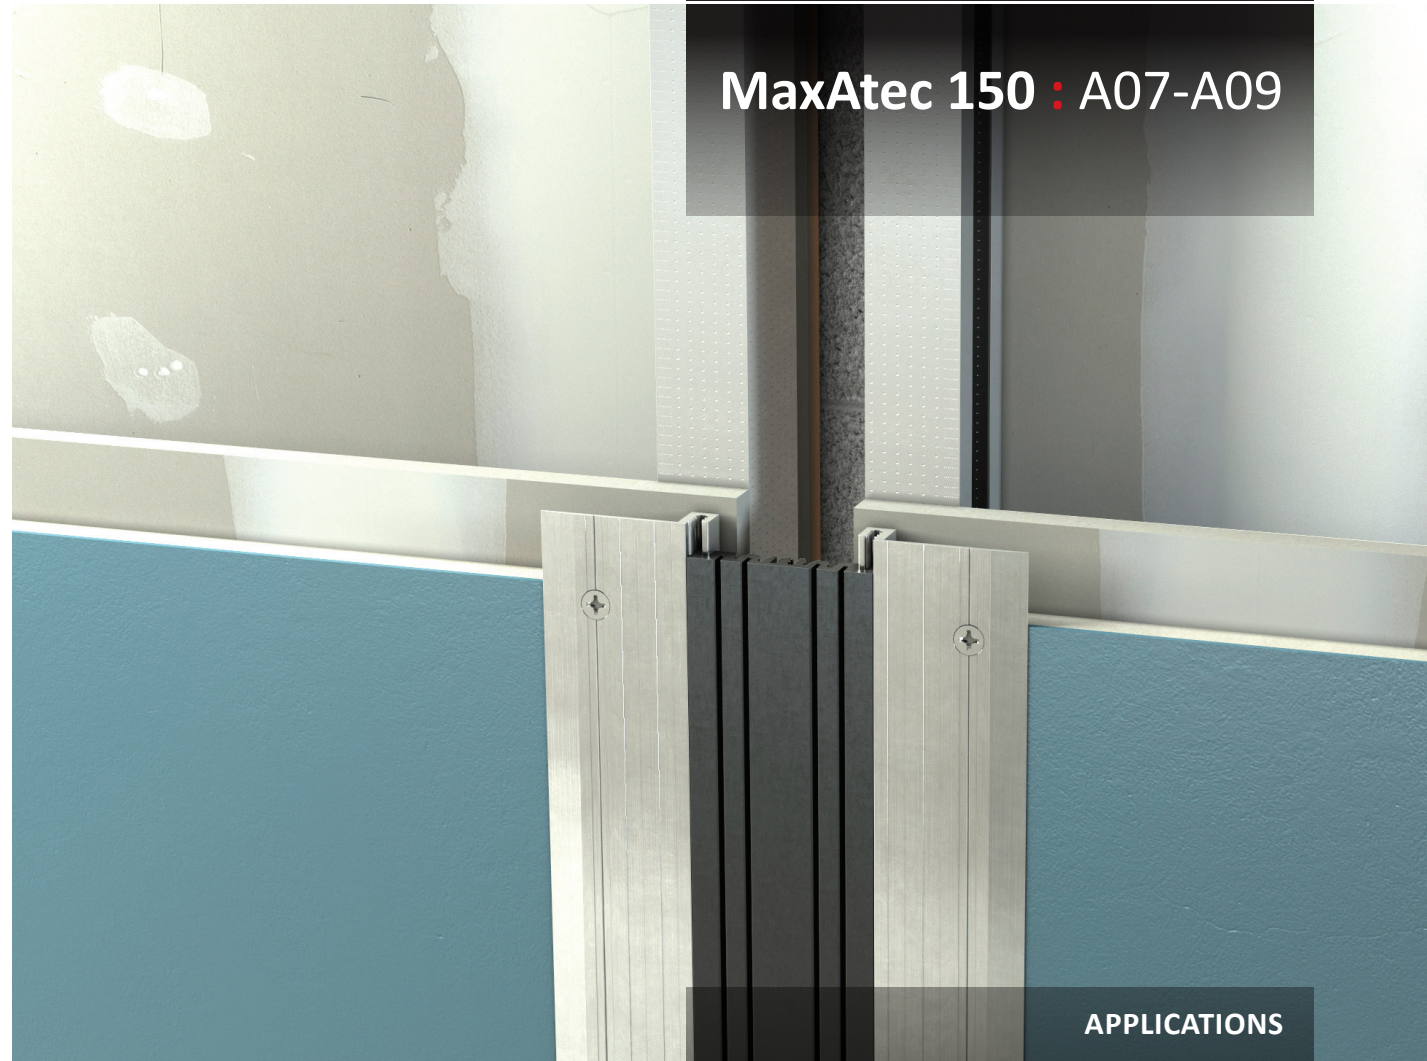

MaxAtec 150 : A07-A09

APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
 Department Stores | Distribution & Retail Warehouses
 Factories | Hospitals | Museums | Offices & Hotels
 Parking | Places of Worship | Residential Buildings
 Rail, Metros & Elevated Rail Stations | Roads & Bridges
 Shopping Centres | Sports Stadiums | Supermarkets