


## METAL EXPANSION JOINT

Wall to Wall | Corner to Wall


25 - 50 mm (1 - 2") Expansion Gaps

# MegAtec 380 : A07-A09

### MegAtec 380 : A07

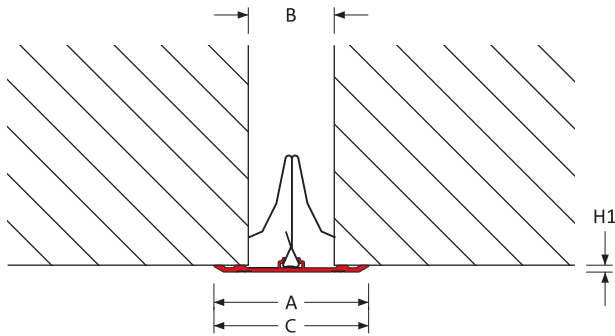

### MegAtec 380 : A09

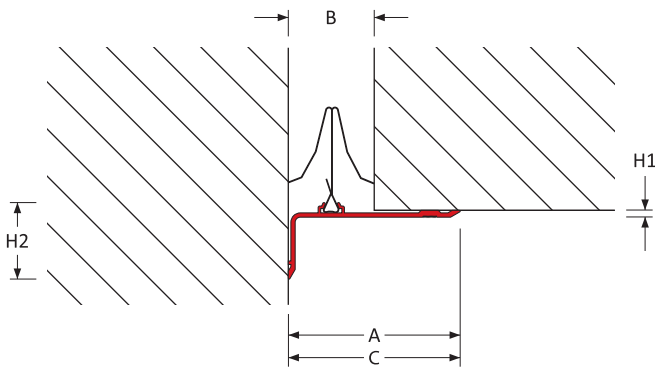

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Wall - Wall	25	± 6	[12]	-	-	-	-	6	-	50	50	380-A07-025-006
	35	± 9	[18]	-	-	-	-			70	70	380-A07-035-006
	50	± 12	[24]	-	-	-	-			90	90	380-A07-050-006
Corner - Wall	25	± 6	[12]	-	-	-	-	6	23	50	50	380-A09-025-006
	35	± 9	[18]	-	-	-	-		28	70	70	380-A09-035-006
	50	± 12	[24]	-	-	-	-		35	90	90	380-A09-050-006

## Features

### Surface

Raised surface  
No visible fixings

### Movement

Good movement capacity  
ASTM E-1399 Class I: Thermal  
Class II: Wind

## Traffic Frequency per day



- - - - -

## System Options

Gap width(s)	25, 35, 50 mm
Height(s)	6 mm
Metal type(s)	6063 T5 & T6 Aluminium
Colour(s)	20/25 micron clear satin anodised finish aluminium
Fire barrier	120 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

# MegAtec 380 : A07-A09

## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets