

MaxAtec 100 : A01-A02

MaxAtec 100 : A01

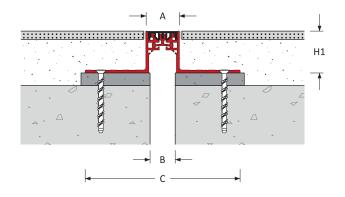

MaxAtec 100: A02

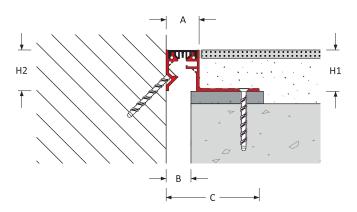

Expansion Joint Selection Criteria Load Rating

| • | · · · · · · · · · · · · · · · · · · · | | | | | | | | | | | |
|---------------|---------------------------------------|------------|---------|----------|----------|---|---|---------------|-----------|-----------|----------|------------------|
| Joint | Gap | Movement | t | Eurocode | e Rating | | | Product Di | imensions | | | Product |
| Location | Width | Capacity (| mm) | | | | | Height | | Sightline | Blockout | Number |
| | B (mm) | ± | [Total] | | | | | H1 (mm) | H2 (mm) | A (mm) | C (mm) | |
| | 30 | ± 5 | [10] | 5 kN | 46 kN | | | 25: 70 | | 40 | 185 | 100-A01-030-(H1) |
| Floor – Floor | 50 | ± 10 | [20] | O LAN | 04 141 | _ | _ | 25: 50: | _ | 71 | 216 | 100-A01-050-(H1) |
| | 75 | ± 15 | [30] | 2 kN | 31 kN | | | 70 | | 93 | 238 | 100-A01-075-(H1) |
| | | | | | | | | | | | | |
| | 30 | ± 5 | [10] | 5 kN | 46 kN | | | 25: 70 | 50 | 40 | 113 | 100-A02-030-(H1) |
| Floor - Wall | 50 | ± 10 | [20] | O LAN | 31 kN | _ | _ | 25: 50: 70 | 75 | 71 | 144 | 100-A02-050-(H1) |
| | 75 | ± 15 | [30] | 2 kN | | | | | | 93 | 166 | 100-A02-075-(H1) |

Product Details

When specifying or ordering please add the height (H1) required to the Product Reference.

For example MaxAtec 100: A01-030-050 denotes a joint 50mm high.

The load ratings are based on the vehicle not exceeding 10mph / 16kmh.





SINGLE-SEAL EXPANSION JOIN

Floor to Floor | Floor to Wall 30 - 75 mm (1 1/4 - 3") Expansion Gaps

Features

Surface

Smooth surface

Centre supported and Americans with Disabilities Act (ADA) compliant across the entire movement cycle

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Traffic Frequency per day

| Ŕ | | | | ••• |
|----------|------|------|---|-----|
| ≤ 25,000 | ≤ 10 | ≤ 10 | - | - |

System Options

| 30, 50, 75 mm |
|------------------------|
| 25, 50, 70 mm |
| 6063 T5 & T6 Aluminium |
| Black (RAL 7021) |
| Grey (RAL 7038) |
| Beige (RAL 1015) |
| 120 minutes |
| Moisture barrier |
| Contact Vexcolt |
| |

