

# MaxAtec 100: S01-S02

### MaxAtec 100: S01

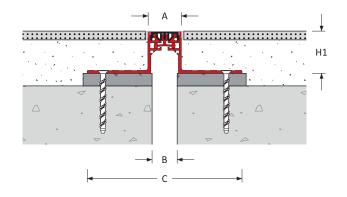

### MaxAtec 100 : S02

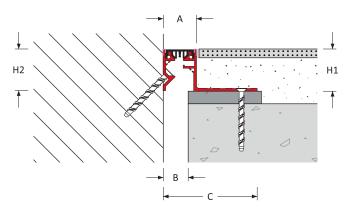

# **Expansion Joint Selection Criteria** Load Rating

## Product Details

Joint	Gap	Movement		Eurocode Rating				Product Dimensions			Product	
Location	Width	Capacity (mm)						Height		Sightline	Blockout	Number
	B (mm)	±	[Total]				000	H1 (mm)	H2 (mm)	A (mm)	C (mm)	
	30	± 5	[10]	5 kN	46 kN	_	_	26: 71		41	185	100-S01-030-(H1)
Floor – Floor	50	± 10	[20]	2 kN	31 kN			26: 51: – 71	72	216	100-S01-050-(H1)	
	75	± 15	[30]							94	238	100-S01-075-(H1)
Floor – Wall	30	± 5	[10]	5 kN	46 kN	_	_	26: 71	51	41	113	100-S02-030-(H1)
	50	± 10	[20]	2 kN	31 kN			26: 51: 71 76	72	144	100-S02-050-(H1)	
	75	± 15	[30]						70	94	166	100-S02-075-(H1)

When specifying or ordering please add the height (H1) required to the Product Reference.

For example MaxAtec 100: S01-030-051 denotes a joint 51mm high.

The load ratings are based on the vehicle not exceeding 10mph / 16kmh.



#### SINGLE-SEAL EXPANSION JOIN

Floor to Floor | Floor to Wall 30 - 75 mm (1 1/4 - 3") Expansion Gaps

# **Features**

#### Surface

Smooth surface

Centre supported and Americans with Disabilities Act (ADA) compliant across the entire movement cycle

#### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

# **Traffic Frequency per day**

Ż				
≤ 25,000	≤ 10	≤ 10	-	-

# **System Options**

Gap width(s)	30, 50, 75 mm
Height(s)	26, 51, 71 mm
Metal type(s)	6063 T5 & T6 Aluminium
	Stainless Steel cappings
Seal colour(s)	Black (RAL 7021)
	Grey (RAL 7038)
	Beige (RAL 1015)
Fire barrier	120 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

