


SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall


25 - 50 mm (1 - 2") Expansion Gaps

MaxAtec 135 : A07-A09

MaxAtec 135 : A07

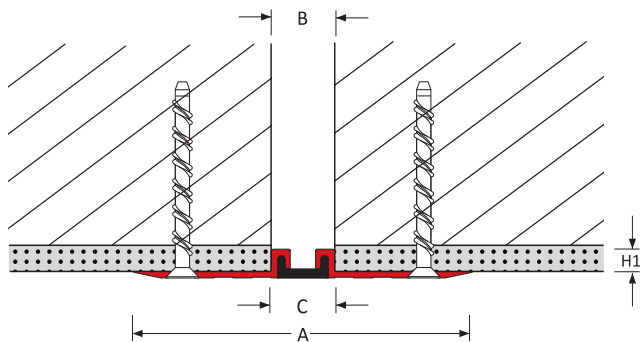

MaxAtec 135 : A09

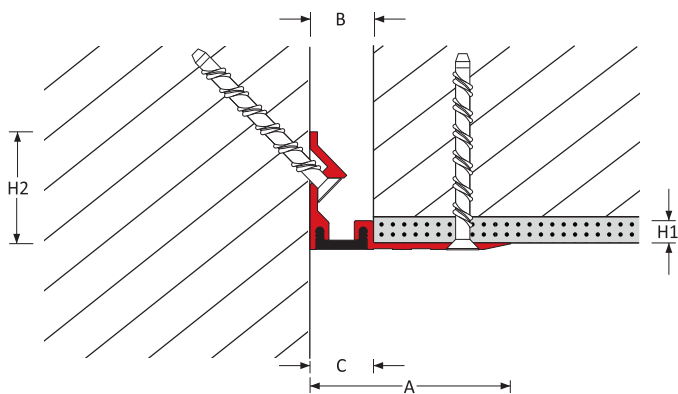


Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions Height		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall – Wall	25	± 5	[10]	–	–	–	–	9	–	133	25	135–A07–025–009
	50	± 10	[20]	–	–	–	–	9	–	155	50	135–A07–050–009
Corner Wall	25	± 5	[10]	–	–	–	–	9	45	79	25	135–A09–025–009
	50	± 10	[20]	–	–	–	–	9	45	101	50	135–A09–050–009

This product is supplied in 3 metre lengths.

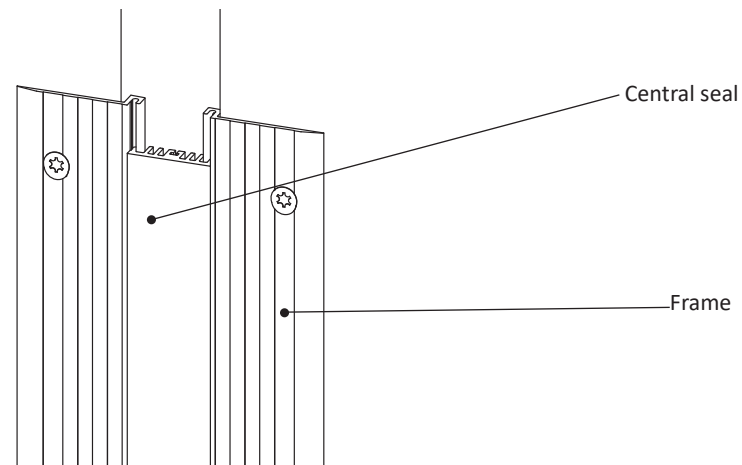

Features

Surface

Smooth surface

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Materials

Metal type : 6063 T5 & T6 Aluminium

Polymer type : PVC - Nitrile

Traffic Frequency per day



-

-

-

-

-

System Options

Gap width(s) 25, 50 mm

Height(s) 9 mm

Seal colour(s) Black (RAL 7021)

Grey (RAL 7038)

Beige (RAL 1015)

White (RAL 9003)

Optional Add-ons

Aluminium Finish(es) Mill finish (Standard)
Anodised : To an Anolok Colour
Powder coated : To a RAL Colour

Fire barrier 120, 240 minutes

Waterproofing EPDM Membrane

Closed-cell Foam

Pre-assembly in factory Contact Vexcolt

SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 50 mm (1 - 2") Expansion Gaps

MaxAtec 135 : A07-A09



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

www.vexcolt.com